


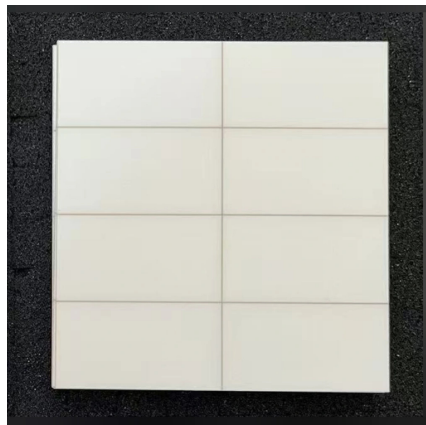

Alumina ceramic panel with laser-scribed separation lines

Laser-Scribed Alumina Substrates for Circuit Panels

Product ID / SKU: FWM/CS-ALU-004
Material: Alumina
Product type: Ceramic Substrate

96% alumina substrates with controlled laser scribing for circuit-panel separation and integrated-circuit production.

96% Alumina Substrate (708 S) Properties

Property	96% Al ₂ O ₃ - 708 S	Test conditions / measurement tolerance ±10%
Density (g/cm ³)	≥3.75	DIN EN 993-1
Bending strength, σ ₀ (MPa)	≥500	-
Young’s modulus (GPa)	≥300	-
Thermal conductivity (W/(m·K))	24	Room temperature; DIN EN 821-2
Linear thermal expansion coefficient (10 ⁻⁶ /K)	7-9	100-800°C; DIN 51045-1
Specific heat capacity (J/(g·K))	≥0.75	20°C; DIN EN 821-3 method B
Relative permittivity	~9.8	Room temperature, 1 MHz; Ra ≤0.4 μm
Dielectric loss factor	≤0.005	Room temperature; 1 MHz; Ra ≤0.4 μm
Volume resistivity (Ω·cm)	≥10 ¹⁴	Room temperature; IEC 62631-3
Breakdown strength (kV/mm)	AC≥15; DC≥15	20°C; AC / DC
Fracture toughness (MPa·m ^½)	≥3.0	Indentation-fracture (IF)